

SPECIFICATIONS

MODEL	POWER	BORE	STROKE	ADVANCE	RAM SPEED		CAPACITY (TONS)	WEIGHT (LBS.)	SHIPPING DIMENSIONS		
					PRESS	RETURN			L	W	H
HFP-200 MWH	10 HP 3 phase	12"	20"	22 IPM	4 IPM	27 IPM	200	7,600	58"	97"	108"

Standard voltages available - please specify when ordering.


H FRAME PRESS 200 Ton Powered Movable Workhead

STANDARD FEATURES

- ✓ **Electric / Hydraulic operation** provides smooth, consistent pressing action.
- ✓ **Open sides** to facilitate work on long pieces.
- ✓ **Flat ram nose** can be easily changed to allow the user to adapt the press to a specific job.
- ✓ **Quality Baldor motor**, low speed.
- ✓ **Low speed pump** - quiet, dependable operation.
- ✓ **Self-locking table** design eliminates lateral movement.
- ✓ **Powered movable workhead** for off-center work allows operator to position the cylinder from left to right with the touch of a lever.
- ✓ **Hydraulic power-lift** for vertical displacement of table.
- ✓ **Pressure regulator** to limit the ram pressure.
- ✓ **Cylinder activation** is fingertip controlled, the more the hand lever is engaged the more the ram movement is accelerated. This allows the operator to control the proper speed for the task.
- ✓ **High capacity** 20 GAL. hydraulic oil reservoir.
- ✓ **Low pressure** hydraulic system maintains lower oil temperatures, resulting in higher efficiency and safer operation.
- ✓ **All hydraulic and mechanical parts are standard** in the industry, and available throughout North America.

DIMENSIONS (INCHES)

MODEL	A	B	C	D	E	F
HFP-200 MWH	94	60	84	30.5	20	42

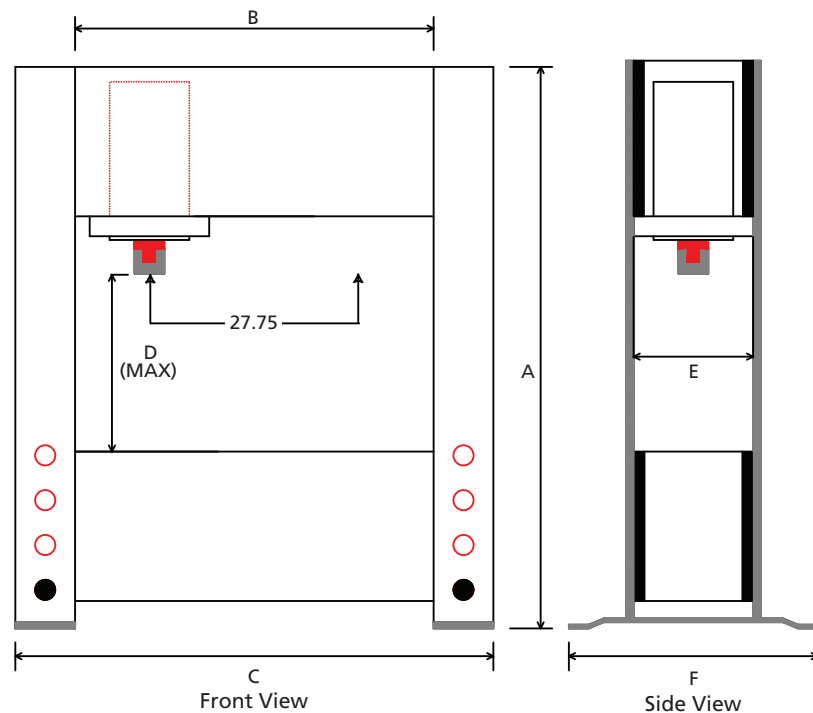

AVAILABLE OPTIONS

- VB-200** V BLOCKS matched pair.
- FSG-200** Front safety guard for operator protection.
- FPS-200** Foot pedal-electric solenoid valve for hands-free operation, c/w electric control panel.
- 10-230-1** 10 HP 230 VOLTS 1 PHASE 41 AMPS.
- SSE-200** Stop / Start c/w emergency stop button, wired direct to motor.

Custom designs available
We Build Them your Way!